


# Conveyor system XH

## System information



### Chain width 103 mm

The XH conveyor is also available in a stainless steel version. See page 307.

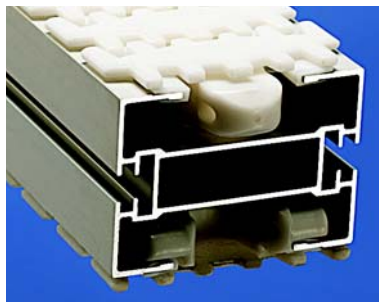

### Features

Suitable for larger items, especially if point of balance is somewhat offcenter. Higher capacity than XS and XL.

### Examples of application areas

Large ball bearings, turbo rotors, safety belt brackets, electric motors, shock absorbers, video cassettes, steering arm components, boxes.

### Technical characteristics

Drive unit capacity .....	1250 N
Chain tension limit .....	1250 N
Beam width .....	105 mm
Chain width .....	103 mm
Chain pitch .....	35,5 mm
Item width .....	25–300 mm
Maximum item weight	
Horizontal transport .....	20 kg
Vertical transport.....	15 kg
Maximum weight on conveyor.....	150–300 kg
Maximum conveyor length .....	30 m

PO  
XS  
XL  
XLP  
XM  
XMP  
**XH**  
XK  
XKP  
XB  
GR  
CS  
XT  
XC  
XF  
FST  
XMY  
XLX  
XMX  
XHX  
GRX  
CSX  
APX  
IDX